

## 24070

### Heavy latch mortice lock with anti-friction lever latch (KF)



#### Product profile

For commercial buildings, offices, schools, hospitals and upmarket housing.

Lock must not be used in combination with electric strikes.

#### Standard version

Backset 60 mm

Forend satin stainless steel

Forend 230x18 mm, radiussed

Clamp follower 8 mm

Lock case blue galvanised

Antifriction lever latch, crank in plastic material

Latch damper

Single turn deadbolt in steel, 13mm

Centres 78 mm

Anti-thrust latch by control bolt

Control bolt retracted by latch

#### Cutout

24070.6 RZ - latch withdrawal

24070.7 PZ - latch withdrawal

#### Options

Backset 70 mm

Backset 80 mm

Clamp follower 9 mm

#### Package

single packaging

Package, 10 pces (left or right)

#### Standards

EN 1634-1: EI 30

EN 12209: 3M510F1HA30


#### Important note

Please take care for the milling of the crank at the lock mortise. See dimension drawing. The lock 24070 may not be used with adjustable strike plates (for example V-1151).



## 24070

Heavy latch mortice lock with anti-friction lever latch (KF)

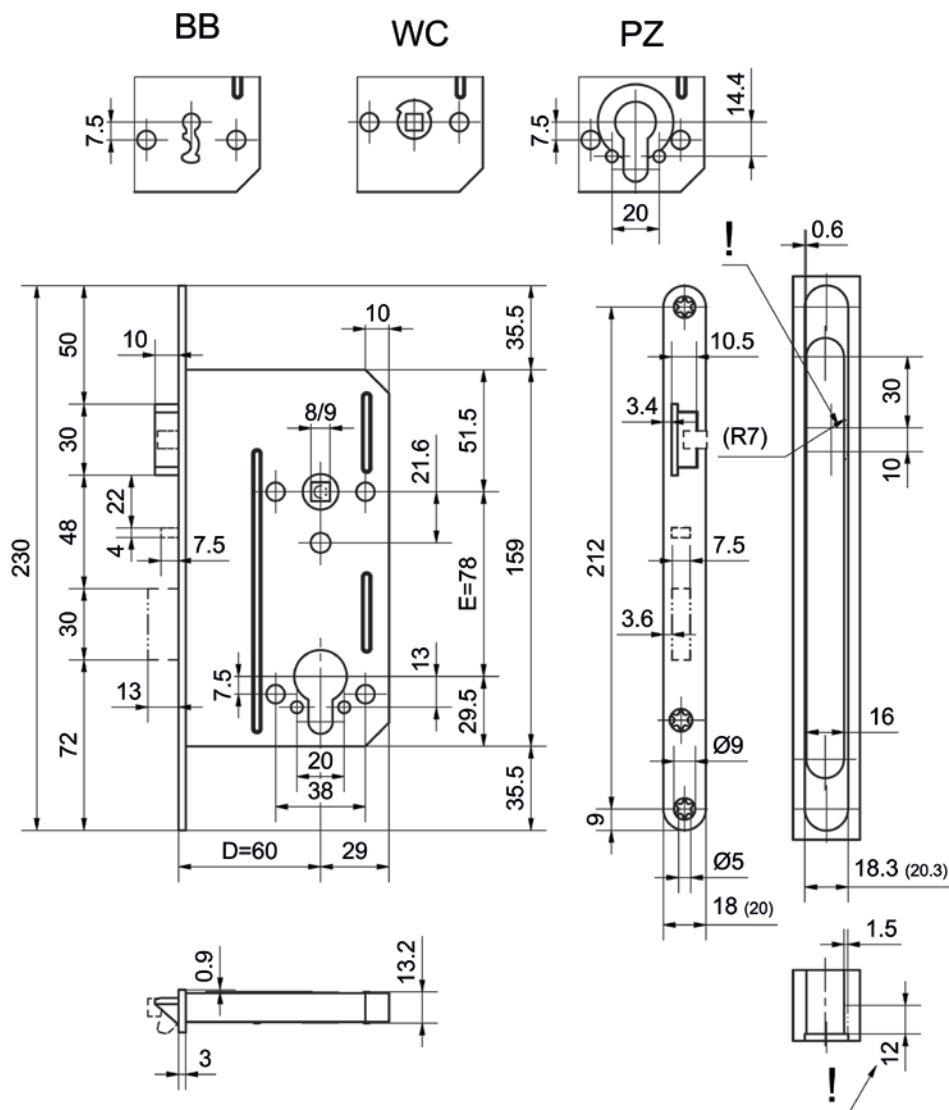

11xx / 12xx / 240xx - schweres Einsteckschloss CH  
Massbild alle Ausführungen