


11104 Cable adapter HZ-lock VB to MINT ELK

14-pole to 12-pole

Product profile

The cable adapter is suitable for connecting an existing HZ-lock VB cable (14-pin, from year of manufacture 2002) to a MINT HZ ELK or MINT ELK lock (12-pin) and can therefore be used in the event of renovation.

When replacing an HZ-lock VB with a MINT HZ ELK or MINT ELK, it is recommended to replace the cable whenever possible. If this is not possible, this cable adapter can be used between the new lock and the existing cable. The existing cable must be disconnected on site before fitting the adapter (risk of short circuit!). Once the lock has been installed, it must be reconnected on site by a specialist using the MINT ELK connection diagram.

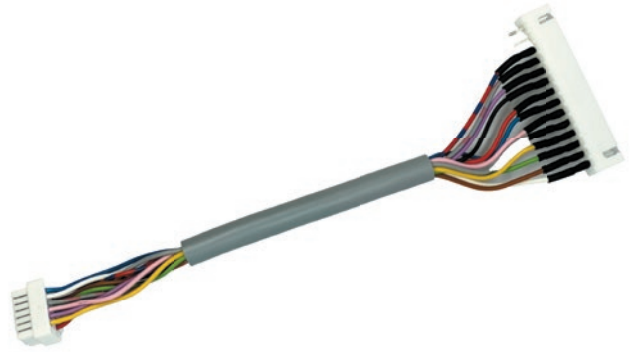

Important note


Before attaching the cable adapter, the existing cable must be disconnected on site (risk of short circuit!).

This cable adapter cannot be used for HZ-lock VB with a 12-pin or 10-pin connection (built before 2002).


11104 Cable adapter HZ-lock VB to MINT ELK

14-pole to 12-pole


Mantelfarbe: grau
Couleur de la gaine: gris
Cable jacket: gray

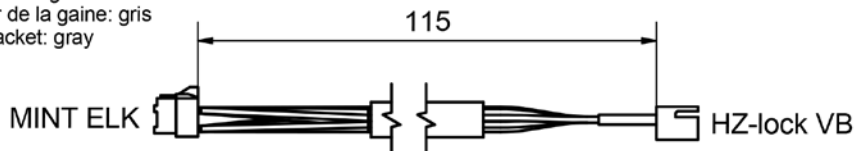

Pin	Farbe / Couleur / Color
12	gelb / jaune / yellow
11	rot / rouge / red
10	violett / violet / purple
9	grau / gris / grey
8	rosa / rose / pink
7	rot-blau / rouge-bleu / red-blue
6	grau-rosa / gris-rose / grey-pink
5	grün / vert / green
4	weiss / blanc / white
3	braun / brun / brown
2	blau / bleu / blue
1	schwarz / noir / black

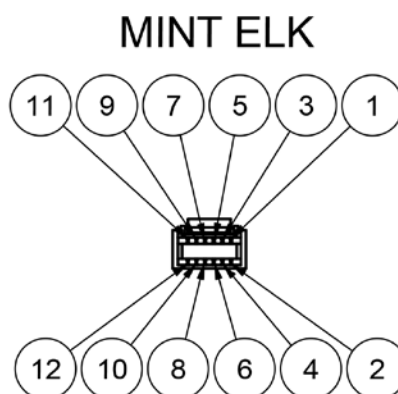

HZ-lock VB

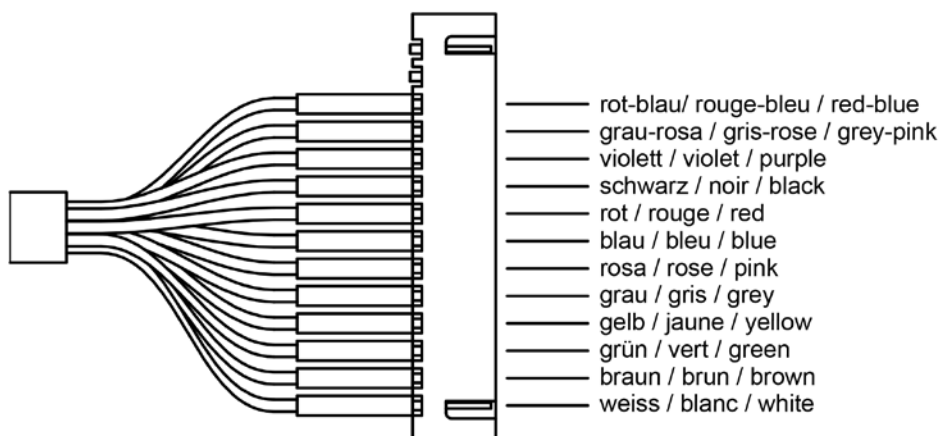

11104 - Kabeladapter HZ-lock VB zu MINT ELK
Massbild