

## 1240

### Heavy duty mortice lock, panic function E



#### Product profile

For hotel rooms / offices

Panic function E: Use knob/lever set (lever handle/female part on the inside, knob on the outside, spindle 5910 or 5911)

Suitable in connection with mechatronic hardware eAccess (lever - lever)

With panic function E (without split follower)

Lock must not be used in combination with electric strikes

#### Standard version

Backset 60 mm

Forend 230x18 mm, radiussed, stainless steel

Clamp follower 9 mm

Steel latch

Latch damper

Single turn deadbolt in steel, 13 mm

Centres 78 mm

Anti-thrust latch by control bolt

Automatic locking deadbolt by control bolt

Silent closing latch

#### Cutout

1240.6 RZ - latch withdrawal

1240.7 PZ - latch withdrawal

#### Options

Backset 70 mm

Backset 80 mm

#### Package

single packaging

industrial packaging, 50 pces (left or right)

carpenter packaging, 50 pces (25 left / 25 right)

#### Standards

EN 1634-1: EI 30

EN 12209: 3M510F2HB30

Tested to EN 179 in connection with Glutz lever handles. For a current list of models please refer to our website.: [www.glutz.com](http://www.glutz.com)

Tested to EN 1125 in connection with Glutz panic device 8615

Strike plates tested in sets: For rebated doors B-1151.711

For flush edged doors B-1001.431




#### Important note

On mortice locks for emergency / panic exit doors, cylinder with door knop must not be installed, and key must not be left in lock.

1240

### Heavy duty mortice lock, panic function E

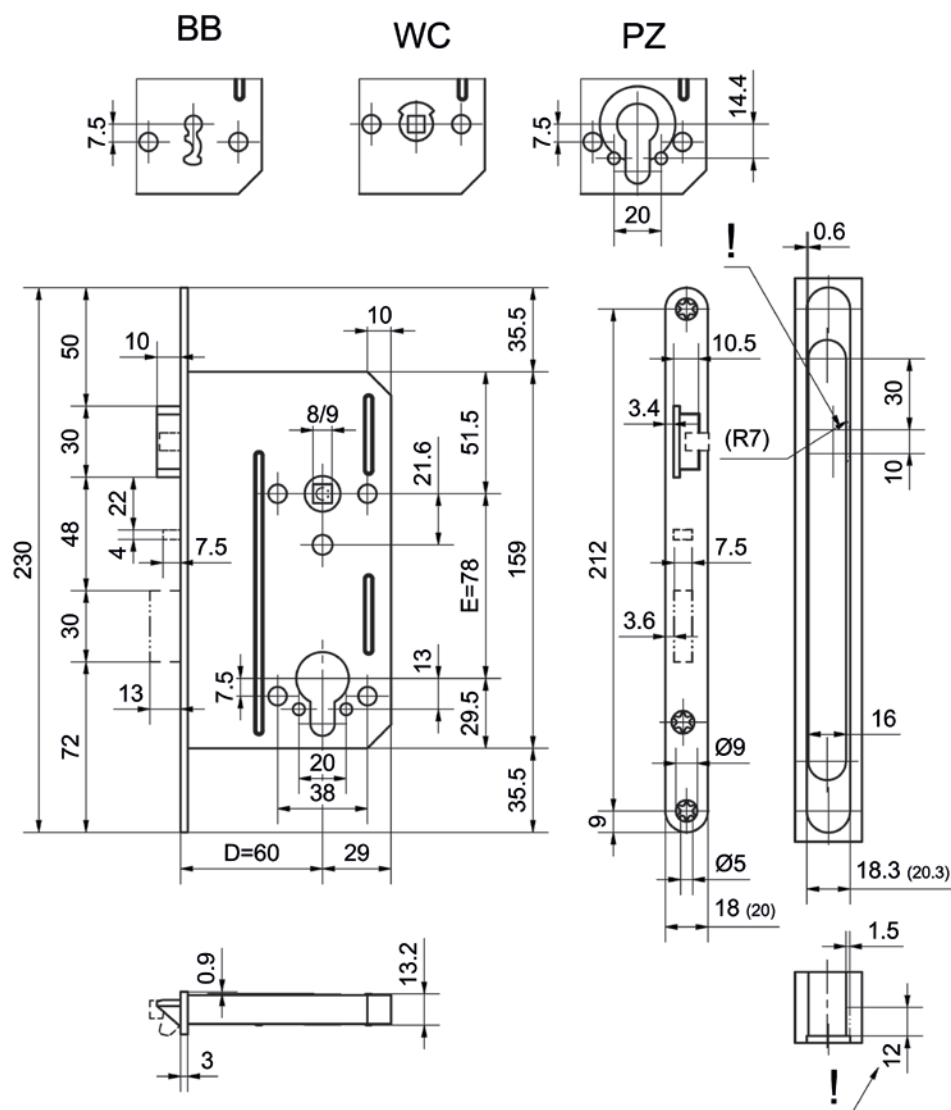

**11xx / 12xx / 240xx - schweres Einsteckschloss CH**  
Massbild alle Ausführungen